



150-1 IN-LINE CONNECTOR FACES

1998 EXPLORER/MOUNTAINEER

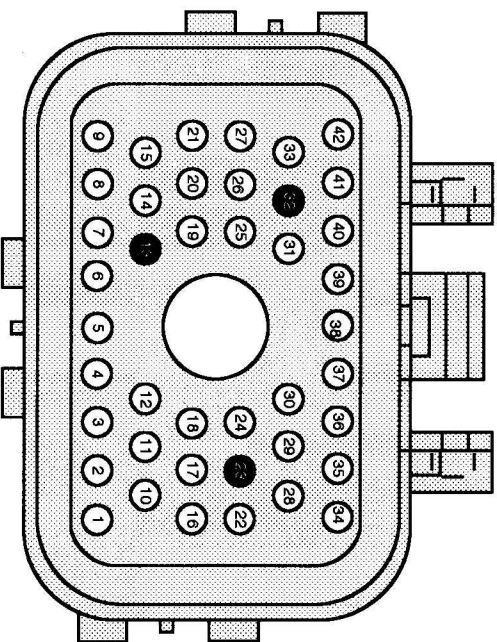

C115F

PIN	CIRCUIT	PIN	CIRCUIT
1	16 (R/LG)	22	107 (P)
2	11 (T/Y)	23	—
3	915 (PK/LB)	24	329 (PK)
4	810 (R/LG)	25	298 (P/O)
5	238 (DG/Y)	26	253 (DG/W)
6	658 (PK/LG)	27	305 (LB/PK)
7	679 (GY/BK)	28	394 (O/BK)
8	37 (Y)	29	784 (LB/BK)
9	361 (R)	30	331 (PK/Y)
10	29 (Y/W)	31	1093 (T/R)
11	914 (T/O)	32	—
12	224 (T/W)	33	463 (R/W)
13	—	34	570 (BK/W)
14	91 (P/W)	35	347 (BK/Y)
15	926 (LB/O)	36	34 (LB/O)
16	39 (R/W)	37	348 (P)
17	791 (R/PK)	38	357 (Y/W)
18	359 (GY/R)	39	191 (LG/BK)
19	351 (BR/W)	40	911 (W/LG)
20	199 (LB/Y)	41	904 (LG/R)
21	140 (BK/PK)	42	36 (Y/W)

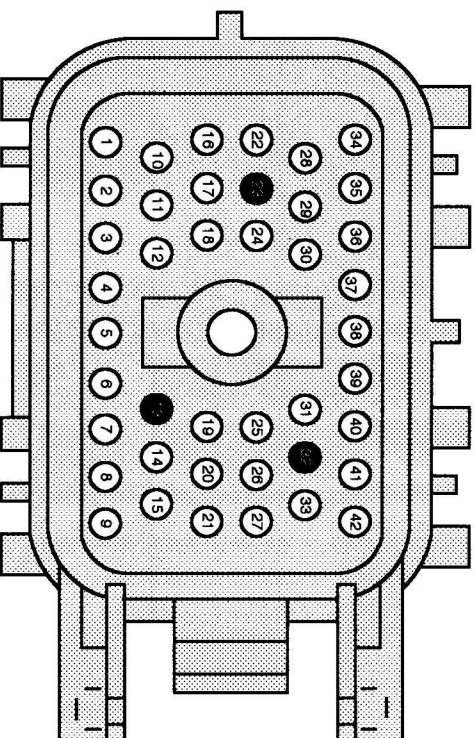

C115M

PIN	CIRCUIT	PIN	CIRCUIT
1	16 (R/LG)	22	107 (P)
2	11 (T/Y)	23	—
3	915 (PK/LB)	24	329 (PK)
4	810 (R/LG)	25	298 (P/O)
5	238 (DG/Y)	26	253 (DG/W)
6	658 (PK/LG)	27	305 (LB/PK)
7	679 (GY/BK)	28	394 (O/BK)
8	37 (Y)	29	784 (LB/BK)
9	361 (R)	30	331 (PK/Y)
10	*29 (Y/W)	31	1093 (T/R)
11	914 (T/O)	32	—
12	224 (T/W)	33	463 (R/W)
13	—	34	570 (BK/W)
14	91 (P/W)	35	347 (BK/Y)
15	926 (LB/O)	36	34 (LB/O)
16	39 (R/W)	37	348 (P)
17	791 (R/PK)	38	357 (Y/W)
18	359 (GY/R)	39	191 (LG/BK)
19	351 (BR/W)	40	911 (W/LG)
20	199 (LB/Y)	41	904 (LG/R)
21	140 (BK/PK)	42	36 (Y/W)