



# 150-1 IN-LINE CONNECTOR FACES

\* MANUAL TRANSMISSION  
\*\* 3.0L

12B637

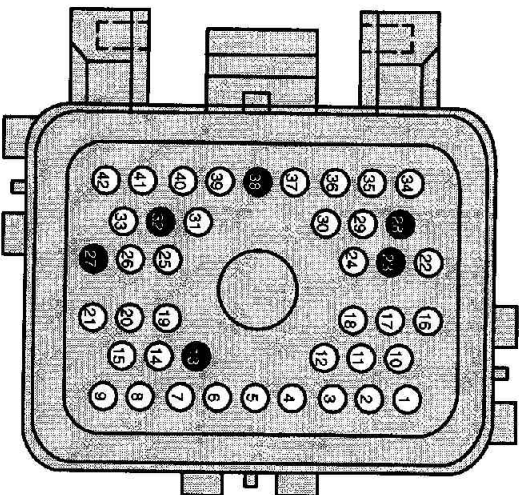

14290

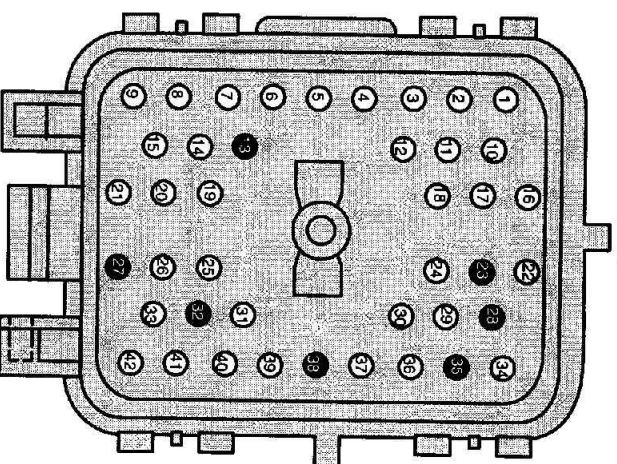

C124F

C124M

PIN NUMBER	CIRCUIT	PIN NUMBER	CIRCUIT	PIN NUMBER	CIRCUIT
1	16 (RD/LG)	15	926 (LB/OG)	29	784 (LB/BK)
2	11 (TN/YE)	16	39 (RD/WH)	30	331 (PK/YE)
3	915 (PK/LB)	17	791 (RD/PK)	31	1093 (TN/RD)
4	810 (RD/LG)	18	359 (GY/RD)		*329 (PK)
5	238 (DG/YE)	19	351 (BN/WH)	32	—
6	658 (PK/LG)	20	199 (LB/YE)	33	463 (RD/WH)
7	679 (GY/BK)		**21 (DG/LG)	34	570 (BK/WH)
8	37 (YE)	21	140 (BK/PK)	35	347 (BK/YE)
9	361 (RD)	22	107 (VT)	36	34 (LB/OG)
10	29 (YE/WH)	23	—	37	348 (VT)
11	914 (TN/OG)	24	329 (PK)	38	—
12	224 (TN/WH)	25	298 (VT/OG)	39	191 (LG/BK)
13	—	26	253 (DG/WH)	40	911 (WH/LG)
14	91 (VT/WH)	27	—	41	904 (LG/RD)
		28	—	42	36 (YE/WH)